



固定フランジ

● RF 圧力フランジ

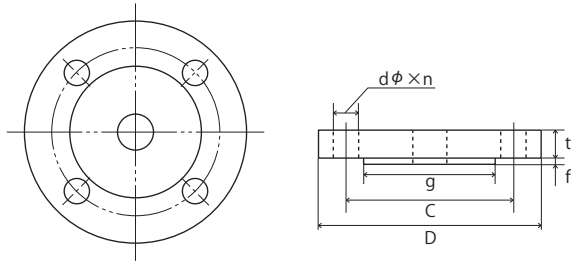

● FF 圧力フランジ

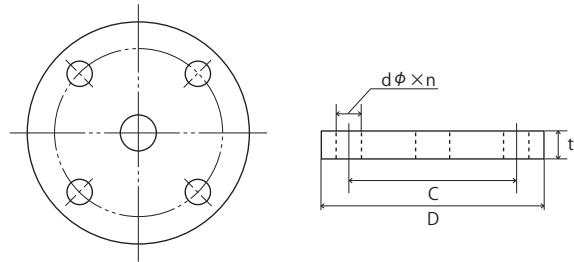

● RF・FF 圧力フランジ (JIS 規格)

耐圧	呼称		D	C	g	t	f	穴径 d	穴数 n
	A	B							
5K	10	3/8	75	55	42	9	1	12	4
	15	1/2	80	60	48	9	1	12	4
	20	3/4	85	65	52	10	1	12	4
	25	1	95	75	62	10	1	12	4
	32	5/4	115	90	72	12	2	15	4
	40	3/2	120	95	78	12	2	15	4
	50	2	130	105	88	14	2	15	4
10K	10	3/8	90	65	48	12	1	15	4
	15	1/2	95	70	52	12	1	15	4
	20	3/4	100	75	58	14	1	15	4
	25	1	125	90	70	14	1	19	4
	32	5/4	135	100	80	16	2	19	4
	40	3/2	140	105	85	16	2	19	4
	50	2	155	120	100	16	2	19	4
20K	10	3/8	90	65	48	14	1	15	4
	15	1/2	95	70	52	14	1	15	4
	20	3/4	100	75	58	16	1	15	4
	25	1	125	90	70	16	1	19	4
	32	5/4	135	100	80	18	2	19	4
	40	3/2	140	105	85	18	2	19	4
	50	2	155	120	100	18	2	19	8

※ 材質はSUS304が標準です。鉄(SS400)等、その他の材質は別途お問い合わせ下さい。

(mm)